

Industry's First All Plastic Combo  
Gauge + Isolator-No Filling Required  
'Plug & Play'



**truflo**<sup>®</sup>  
old bag

... Always Watching

# The 'Old Bag' Pressure Gauge & Isolator

All in One Plastic Filter and Strainer Change-Out Alert

## FEATURES

- All Plastic (Gauge + Isolator) Filled
- Heavy Duty Design; Simple to Install
- Completely Corrosion Resistant
- Designed to Act as Visual Pressure Alert for Bag/Filter Change-Out
- Extra Large Colored Display
- Reduces Pressure Surges caused by Water Hammer or Metering Pump Pulsations
- Highest Accuracy in Industry 1.5%
- Factory Pre-Filled Glycerin or Silicone No Filling Required
- One-Piece Molded Design (No Assembly)
- Suitable for Corrosive Media + Slurries

## SPECIFICATION

Dial Diameter	Large 2½" (Big Numbers-Clear Markers)
Mounting	Direct Mount, Bottom Connection FNPT ½"
Housing	PVDF or Polypro - Viton or PTFE Diaphragm - One Piece Molded Design (No Assembly or Filling Required)
Lens	Safety Glass
Dial	Red & Black Scale White Background, dial arc 270°
Measuring Principle	Bourdon Tube-SS316 (Non Wetted) Diaphragm (wetted part) - FPM (Standard)
Movement	SS316 (Non Wetted)
Gauge	Red, Yellow, Green Moveable Plastic Markers-Pressure Range Pointers Fitted on the Bezel
Connection	1/2" FNPT
Filling	Options: Glycerin or Silicon Filled
Accuracy	±1.5% F.S.
Operating temperature	Max. Working Temp. PVDF-195 F, PP-170°F
Pressure Range	Standard range <b>0-60 / 0-100 / 0-160</b> PSI (Second Scale: Bar) Other units available, e.g., bar, MPa, etc.




PVDF Version



**truflo**<sup>®</sup>  
old bag

... Always Watching

## HOW TO ORDER

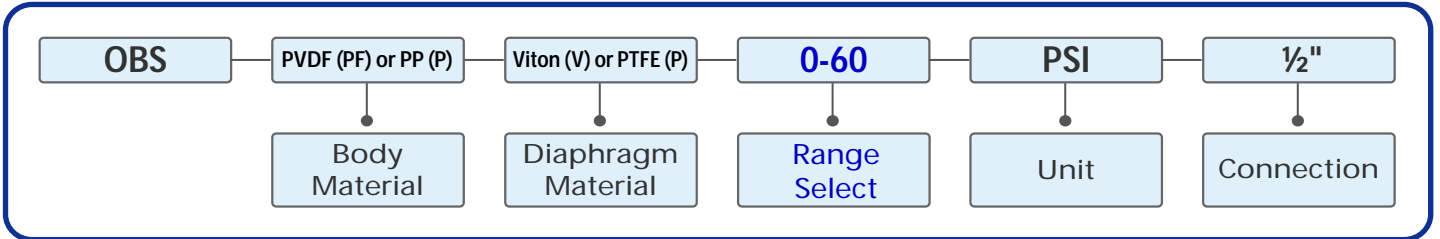

## OBS Series

